

# TEXIO アップデート手順書

## GDS-2000A シリーズ

株式会社 テクシオ・テクノロジー

### 1. 概要

本説明書は GDS-2000A シリーズを最新のファームウェアに更新するものです。  
必要な機材は以下の通りです。

USB メモリ 空き容量 20Mbyte 以上


アップデートファイル \*\*\*\*.upg

### 2. アップデート方法



**注意** 更新中は完了のメッセージが出るまで絶対に電源を切らないでください。

1. USB メモリのルートにアップデートファイルをコピーしてください。
2. 前面パネルの USB コネクタに USB メモ리를挿入してください。
3. **Utility** キー → **ファイル操作** を選択して USB メモリのファイル一覧を表示します。
4. アップデートファイルを選択し、**Select** キーを 2 回押します。

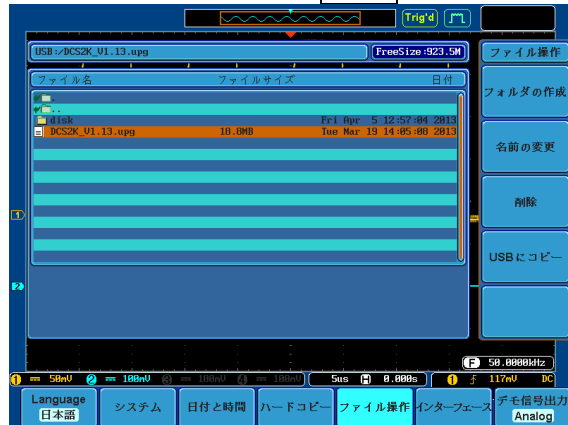

5. 完了の表示が出るまで数分間待ちます。
  6. USB メモリを外して電源の再投入をしてください。
  7. セルフチェック中に更新と初期化を行ないますので数分間待ちます。
  8. **Default** キーを押して初期化します。
  9. 必要に応じて言語設定などを行ってください。
- 以上で完了です。

# TEXIO FIRMWARE UPDATE PROCEDURE

## GDS-2000A Series

TEXIO TECHNOLOGY CORPORATION

### 1. Overview

This manual is to how to update the firmware to the latest GDS-2000A series.  
The equipment required is as follows.

USB Flash Disk Free space or more 20Mbyte

Update File \*\*\*\*.upg


### 2. Update procedure



**Note** Please do not turn off the power of the message is complete until during the update.

#### Steps

1. Please copy the update file to root of the USB Flash Disk
2. Please insert the USB Flash Disk to the USB connector on the front panel.
3. Select the **Utility** key → **File Utility**, and to display a list of files in USB Flash Disk.
4. Select the update file, press twice the **Select** key.

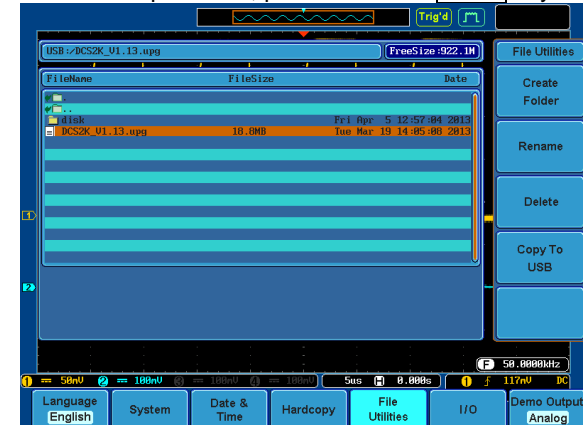

5. Please wait a few minutes until completion displayed.
6. Please to cycle the power on and remove the USB Flash Disk.
7. Wait a few minutes because it performs the initialization and update during the execution of the self-check.
8. Push **Default** key.

Update is complete.